




Desktop Dual-sided Card Printer



S28



Front

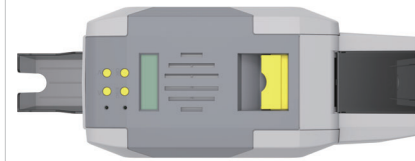

Top



Back

SEAORY S

Lightweight Body, Reliable Quality

Adopt thermal dye-sublimation printing technology with high definition
 With better card-printing capability continuously, saving-time effort
 Simple operation interface and easy to use
 Lightweight body and easy to maintain
 Low noise in printing process
 High printing speed engine

Features

Automatic dual-sided printing
 Support manual feeding by back end
 Support sensor alarm for no card and defective-card slot

Consumables


Full panel YMCKO ribbon: 100 prints/roll, 300 prints/roll
 Full panel YMCKOK ribbon: 240 prints/roll
 1/2 panel YMCKOKO ribbon: 250 prints/roll
 1/2 panel YMCKO ribbon: 450 prints/roll
 Black ribbon: 100mx60mm, 200mx60mm monochrome
 Monochromeribbon(gold/silver/white/red/ blue):100mx60mm
 KO ribbon: 500 prints/roll
 Anti-counterfeit invisible UV ribbon: 100m×60mm

Optional Multi-function modules Support various card printing

Dual interface chip card encoding module
 Contactless ID card encoding module
 UHF chip card encoding module
 Magnetic stripe card encoding module



With high definition photo effect which printed by Dye sublimation technology

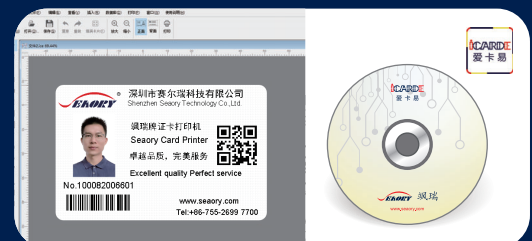

Come with professional printing software



Technical Parameter

Model	S28 / Desktop Dual-sided Card Printer
Specifications	383 × 174 × 208 (mm), 4.6Kg without output hopper
Interfaces	USB2.0 & Ethernet
Input Capacity	100 cards
Output Capacity	50 cards
Print Speed	Monochrome printing: 3~5 s per card(single-sided) / 7~9 s per card(dual-sided); Full-color(YMCKO) printing: 18 s per card(single-sided) / 37 s per card(dual-sided).
Card Material	PVC / Composite PVC
Power	AC 100~240V, 50/60 Hz, DC 24-25.5V, 2.7 A
Print Dimension	ISO CR80 (53.98mm×85.60mm), edge-to-edge printing
Print Resolution	300dpi × 300dpi, 300dpi × 600dpi, 300dpi × 1200dpi
Memory	128MB
Print Method	Dye sublimation (Direct-to-Card)
Card Thickness	0.3-1.05mm
LCM Display	Chinese: 8 characters per line, 2 lines / English: 16 characters per line, 4 lines / Multi-language
Operation System	Driver: Support Windows XP/7/8/10/11, Windows Server 2003/2008/2012/2016, Linux, and NeoKylin, Kylin, UOS and other Made-in-China operating systems. SDK: Support Windows XP/7/8/10/11, Windows Server 2003/2008/2012/2016, Linux, and NeoKylin, Kylin, UOS and other Made-in-China operating systems Card Design Software: iCARDE card design software, support Windows XP/7/8/10/11 operating systems
Warranty	Card printer: 24 months (artificial damage excluded) / Print head: Replace one for free within 1 year (artificial damage excluded)
Operating Condition	1. Regular running temp.: 15°C-30°C(59-86°F), 20%~65% RH non-condensing 2. Lowest / Highest running temp.: 0°C(32°F) / 40°C(104°F), 20%~65% RH non-condensing
Storage Condition	Temp.: -5°C-70°C(23-158°F), 20%~70% RH non-condensing
Certificates	CCC, FCC, CE, ROHS, UKCA

